

TIMBER DOORS

Manufactured from selective timbers compliant with the classification requirements of BS 942 and from FSC certified sustainable sources Doorsets continue to be independently tested and proven to exceed the rigorous demands of PAS 24 with associated 'Secure by Design' for enhanced security performance requirements.

We offer a range of different door types including:

- Single and double doorsets
- French Doors
- Sliding Patio Doors
- Bifolding Doors


Additional prominent features and attributes include:

- 44mm door blade allowing glazing up to 24mm
- 58mm door sash allowing glazing up to 24mm
- 68mm door allowing glazing up to 24,28 or 36mm
- Individual window sections are treated with a preservative treatment which means windows can last up to 60 years.
- Anti warp profile design.
- Glazing configurations compliant with BS 6262-4.
- Choice of internally or externally glazing.
- Raised and fielded panels fully weather sealed.
- Door frames in either engineered timber, or, selected hardwood from sustainable certified sources.
- Fully weather sealed with materials specified by BS EN 12365-1.
- Hardware and fixings corrosive compliance with BS EN 1670.
- Inward or outward opening door leaf.
- Declared conformance with Construction Product Regulations - Harmonized Standard BS EN 14351+A1 and CE marking.
- Option for the inclusion of insulating glass units tested and certified for compliance with BS EN 1279 and BS EN 356.
- Range of optional cills and low threshold to suit both individual property needs, also providing unhindered access and egress.
- Finished doorsets available in an extensive range of high performance, durable stains or paint finishes to agreed customer specification.






Single Door	Door Size	Frame Size
Min Door Height	1770	1844
Max Door Height	2500	2574
Max Door Width	1200	1308
Double Doors	Door Size	Frame Size
Min Door Height	1820	1894
Max Door Height	2759	2833
Max door Width	1200	2580

Drawing A-A

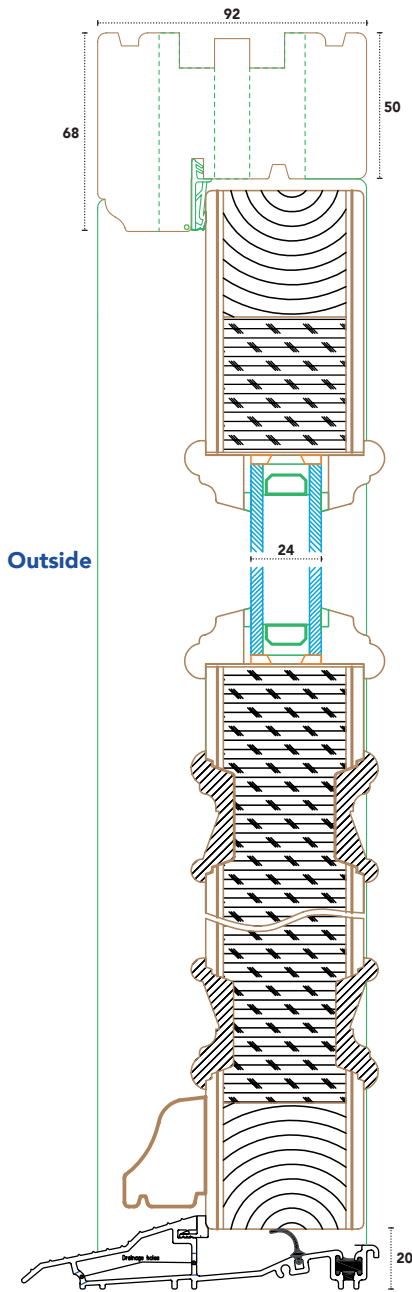

Drawing B-B

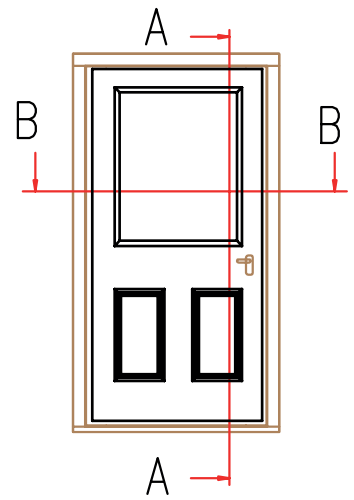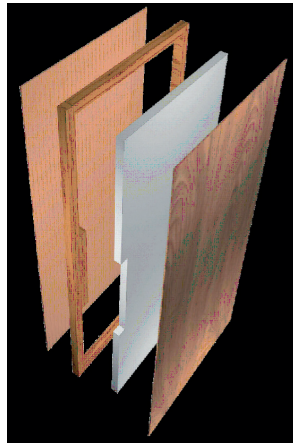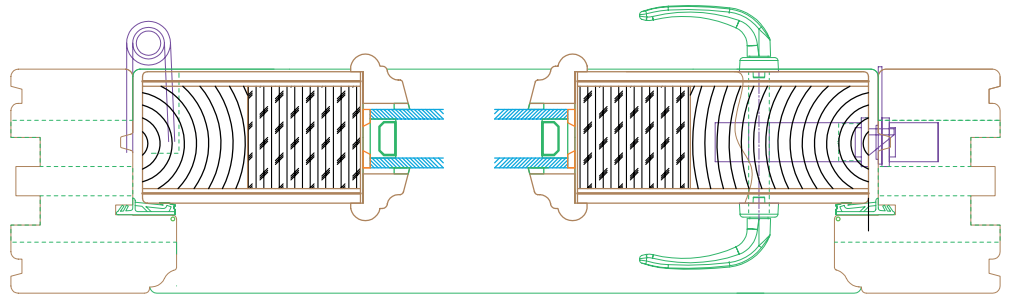

Doorset with 44mm SBD Composite Door

92 x 68mm Frame Head & Jambs
(92 x 56mm also available)

24mm Double Glazed Unit

44mm SBD Composite Door
2x4mm ply + polystyrene +
2 x aluminium inlay

Framing with standard profile
(other profiles available on request
and frame widths)

AM3EX Proline Mobility Trapper
bar (other Cill / Threshold options
are available on request)

Contact

E: bowatersales@veka.com

W: www.bowaterprojects.com

01282 620119