

Kitemark™ Certificate

This is to certify that:

VEKA plc
Farrington Road
Rossendale Road Industrial Estate
Burnley
BB11 5DA
United Kingdom

Holds Certificate Number:

KM 60983


In respect of:

BS EN 12608 / PAS24
PVCU Profile - Enhanced Security Doors System Supplier

This issues the right and licence to use the Kitemark in accordance with the Kitemark Terms and Conditions governing the use of the Kitemark, as may be updated from time to time by BSI Assurance UK Ltd (the "Conditions"). All defined terms in this Certificate shall have the same meaning as in the Conditions.

The use of the Kitemark is authorized in respect of the Product(s) detailed on this Certificate provided at or from the above address.

For and on behalf of BSI:

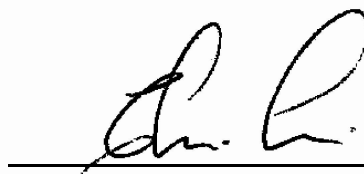

Chris Lewis - Certification Director, Product Certification

First Issued: 2002-04-09

Latest Issue: 2019-10-15

Effective Date: 2019-10-15

Expiry Date: 2022-10-14



Page: 1 of 24

...making excellence a habit.™

Kitemark™ Certificate

No. KM 60983

BS EN 12608:2016 / PAS 24:2016 - General and enhanced security performance requirements for door assemblies.

This Certificate covers the following door system design specification. The following materials are also certificated for use with doors in conjunction with BS 7412 and PAS 24 when foiled in accordance with BS 7722:2010: Only those components that have been approved in accordance with the Kitemark scheme requirements can be incorporated within the system(s) detailed.

M70 Smartfold Door System

Fabricated and installed in accordance with the latest issue of the following Veka plc controlled manual(s):

Veka UK Group M70 Smartfold Door System Technical Manual.

System description:

The door assemblies comprise a maximum door width of 6m length x 2.25m height, open-out, glazed in, laminated on 1 pane to P1A fully glazed, with or without midrail and/or letterplate which meets the requirements of TS 008:2015, enhanced security grade 2, fully welded construction only. The doorsets are fitted with hardware supplied by VBH (GB) Ltd. Glazing is fitted with GT Securi-Clips or GT Snap-Lok.

Size Limitations and Performance Characteristics

Door Type	Length (mm) - Maximum	Height (mm) - Maximum (including sill)	Air Permeability classification	Watertightness classification	Resistance to Wind classification	Exposure category as given in Table 1 of BS 6375-1:2009
Sash dimensions for doors with approved outer frame and sash profiles:						
Individual leaf	874	2146	2	8A	A2	800

First Issued: 2002-04-09
Latest Issue: 2019-10-15

Effective Date: 2019-10-15
Expiry Date: 2022-10-14

Page: 4 of 24

This certificate has been issued by and remains the property of BSI Assurance UK Ltd, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PP, United Kingdom and should be returned immediately upon request.
To check its validity telephone +44 (0) 345 080 9000. An electronic certificate can be authenticated [online](#).