



## Features

### Maximum sash sizes

Top hung: 1376mm (w) x 1376mm (h)  
Side hung: 776mm (w) x 1526mm (h)  
Fixed light: 3000mm (w) x 3000mm (h)

### Outer frames

56mm, 70mm and 85mm outer frames

### Mullions

64mm or 86mm mullions

### Sash

61mm FlushSash

### Finishes

Available in a large assortment of colours and woodgrain options from the Variations range and SPECTRAL\*

### Glazing beads

28mm bevelled  
28mm sculptured  
32mm bevelled  
36mm bevelled

### Ancillaries

Frame extensions, cills and weathering trims  
Range of coupling options  
Range of bay pole options


### Thermal performance\*\*

Achieves U-values as low as 1.3 W/m<sup>2</sup>K using double glazing  
Achieves U-values as low as 1.1 W/m<sup>2</sup>K using triple glazing

\* SPECTRAL is only available on bevelled or flat surfaces.

\*\* Figures can vary dependent on specification.

## Technical Drawing

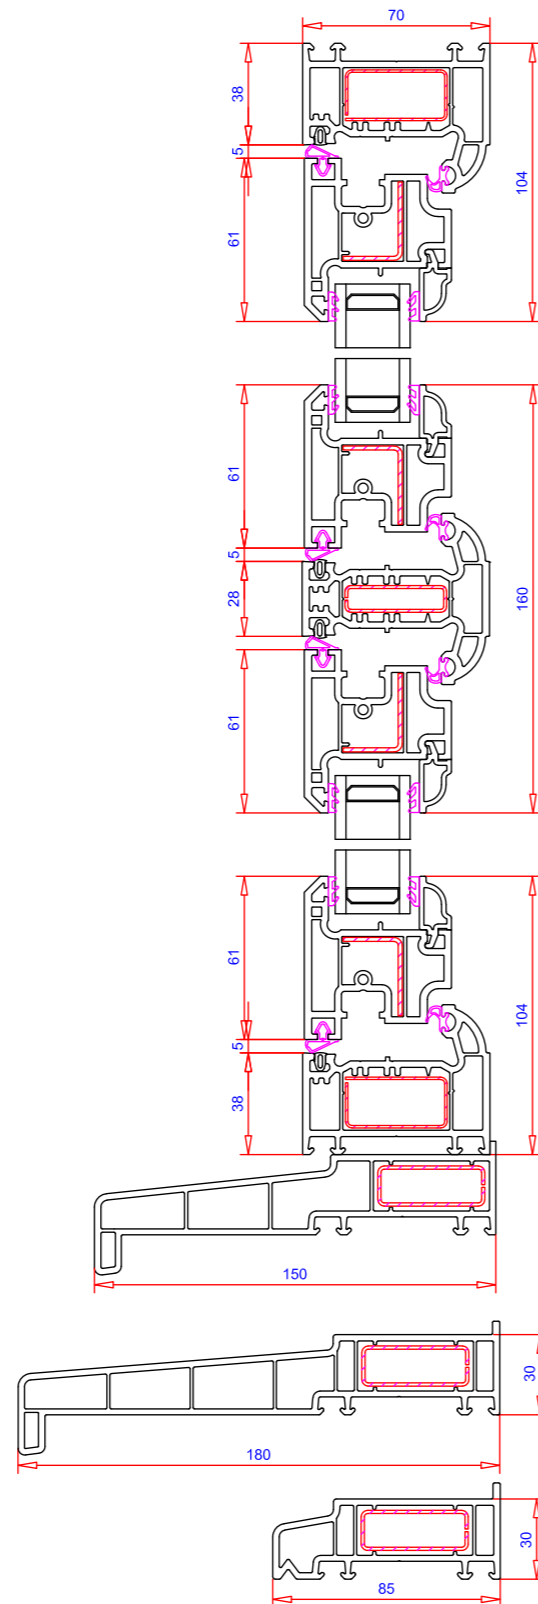

Sculptured inside

## Test Results

Window type	Max sash sizes (wxh)	Air permeability	Water tightness	Resistance to wind	Exposure category
Top hung reinforced	1376mm x 1376mm	Class 3	Class E1050	AE2400	2000+
Side hung reinforced	776mm x 1526mm	Class 4	Class 6A	A3	1200
Fixed light reinforced	3000mm x 3000mm	Class 4	Class E1050	AE2400	2000+